# Concerns About the Potential for Induced Seismicity Associated with the Mississippian Play: Perceived or Real?

Austin Holland and Dr. G. Randy Keller
Oklahoma Geological Survey
University of Oklahoma

#### Outline

- Induced Seismicity Background
- Induced Seismicity Regional Context
- Potential for Induced Seismicity in the Mississippian Play
- Possibilities for Risk Mitigation
- Best Practices

## Earthquake Triggering

#### **Natural Causes**


- Dynamically by the passage of seismic waves
  - typically from very large earthquakes distances > 1000 miles
- Statically by local stress changes from previous earthquakes
  - Small amounts of stress changes have been shown to trigger earthquakes
  - as little as 2-7 psi
- Natural fluid movement
  - May be the cause of many aftershocks of large earthquakes
- Hydrologic loads

#### Anthropogenic

- Reservoir Impoundment
- Mining and Oil Production (Mass Removal)
- Fluid Injection
- Geothermal Production & Thermal Contraction

#### Induced Seismicity from Fluid Injection

- Most of the Earth's upper crust is near failure
- Increased pore pressure from fluid injection effectively reduces friction on fault
  - Or in Mohr-Coulomb space moves the circle towards failure

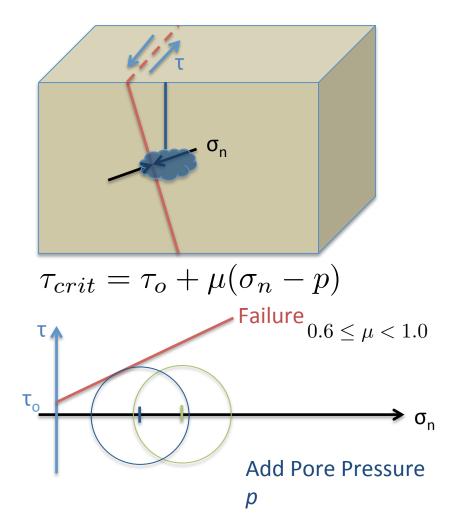


#### Pressure Diffuses Within the Earth

- Pressure increase is not due to actual fluid flow
  - Can be much more rapid
  - Because water is fairly incompressible it is similar to an elastic response although slower
  - Diffusivity is

$$c = T/S$$

- T = transmissivity
- S = storativity
- Pressure increases over time

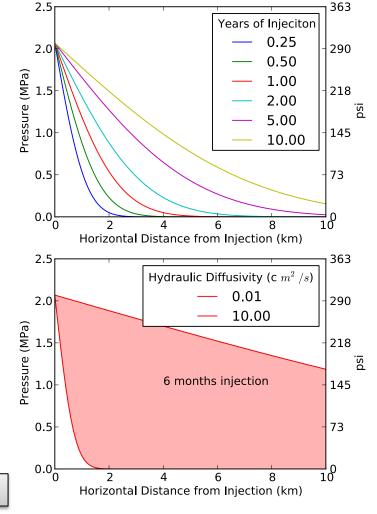


Talwani et al. (2007) J. Geophys Res.

## Risk from Induced Earthquakes

- Hydraulic Fracturing (Lower Risk)
  - Magnitudes less generally less than 0
  - Observed maximum magnitude ( $M_{max}$ ) 3.1-3.4
  - Injection duration may be weeks
- Water Disposal (Higher Risk)
  - Observed  $M_{max}$  5.3-5.7
  - Damage from some events
  - Injection duration may be decades



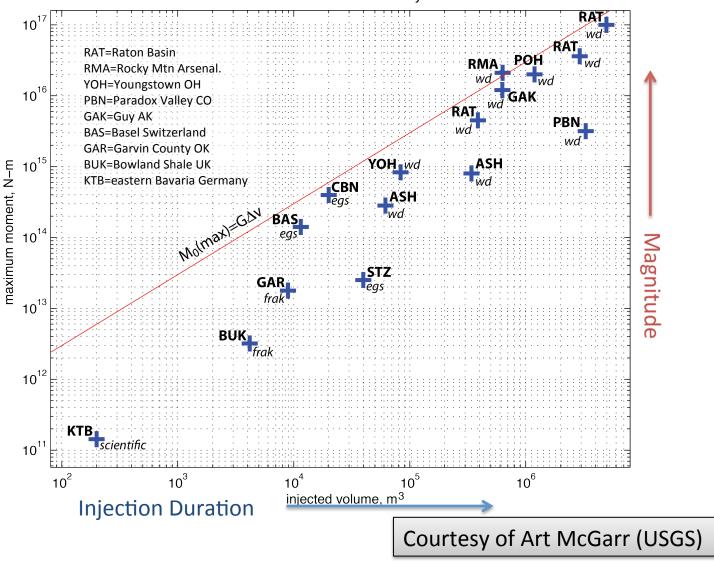


## Injection Induced Seismicity


#### **Best Documented Cases**

- Rangely, CO Raleigh et al. (1976) Science
- Paradox Valley, CO, Ake et al. (2005) Bull. Seismol. Soc. Amer.
- KTB, Germany, Baisch et al.
   (2002) Bull. Seismol. Soc. Amer.
- Basel, Switzerland, Deichmann & Giardini (2009) Seismol. Res. Letters
- Rocky Mountain Arsenal, CO, Hsieh & Bredehoeft (1981) J. Geophys. Res.


#### **General Observations**

- Earthquakes occur first near the well and migrate away from the well with time
- Earthquakes have a clear temporal correlation to injection
- Time and spatial distribution of earthquakes can generally be related to diffusion of pore pressure
- Earthquakes can occur over long distances >20 km
- Modifying injection parameters alters earthquake production

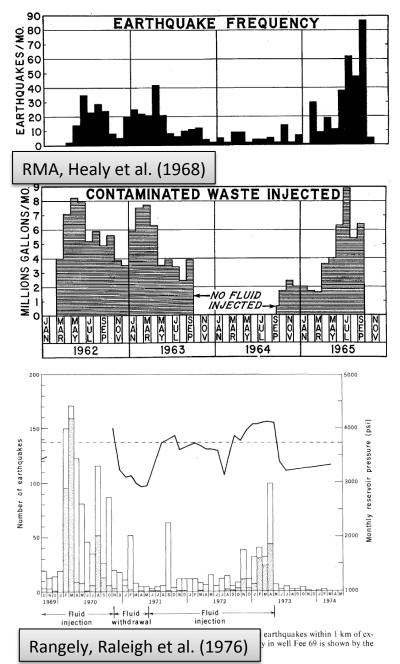

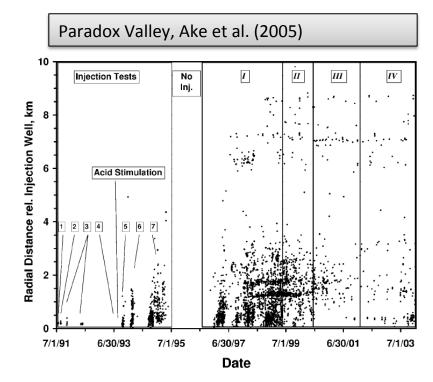

#### **Earthquake Rate Changes in Oklahoma By Region**

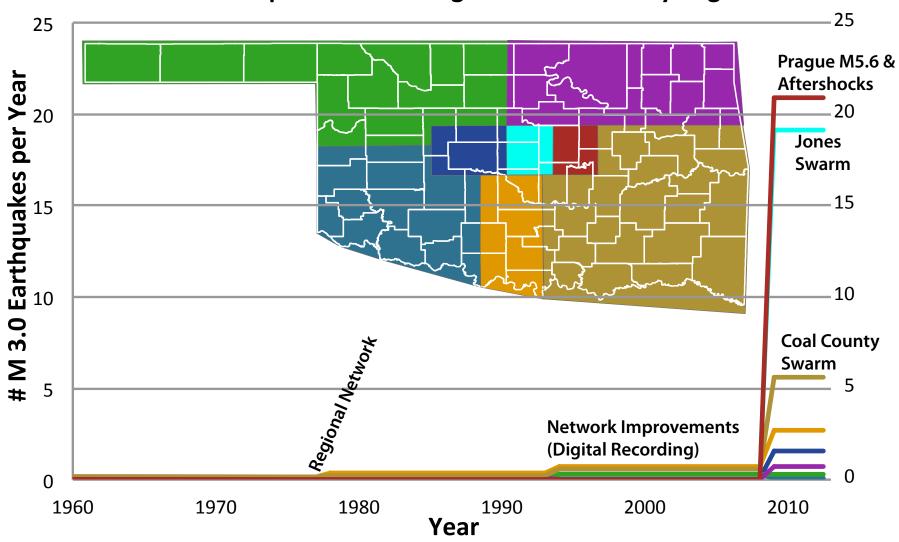


# Induced Seismicity from Water Disposal

- Possible Cases from Oklahoma
  - M5.6 Prague Earthquake, 3 disposal wells within ~1 mile
  - Jones Earthquake Swarm, ~1800 earthquakes, M<sub>max</sub>=4.0, large volume wells within 8-12 miles
  - Examining other possible cases
- Other recent possible cases
  - Guy/Greenbrier, Arkansas, hundreds of earthquakes,  $M_{max}$ =4.7
  - Youngstown, Ohio, ~12 earthquakes, M<sub>max</sub>=4.0
  - DFW Airport, Texas, ~11 earthquakes, M<sub>max</sub>=3.3
  - Barnett Shale, Texas, 67-150 earthquakes,  $M_{max}$ =3.0

#### Outcome of recent cases


- Voluntary or mandatory shut-in of UIC Class II disposal wells (Texas, Arkansas and Ohio)
- Moratorium Zones for UIC Wells (Arkansas)
- New permitting and monitoring requirements (Arkansas and Ohio)

## **UIC Wells and Earthquakes**

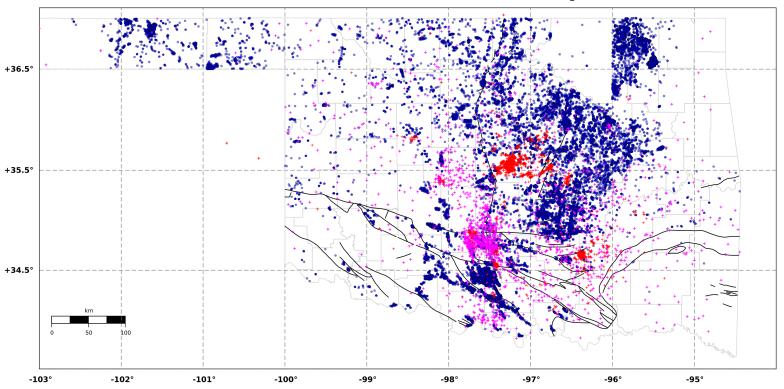


- More than 7,500 active UIC Class II Wells in Oklahoma
- Often spatially clustered

# Increase in Earthquakes Not Matched by Increase in Fluid Injection

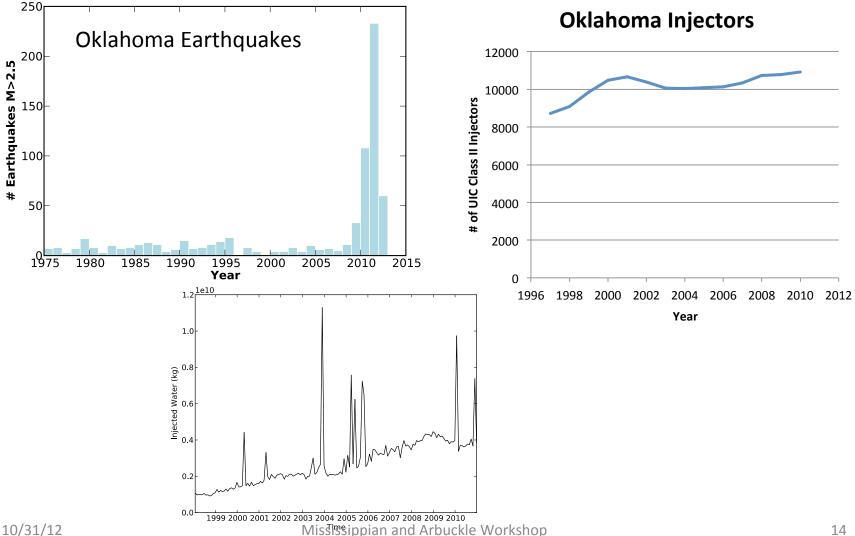


Fluid Injection in Central, OK

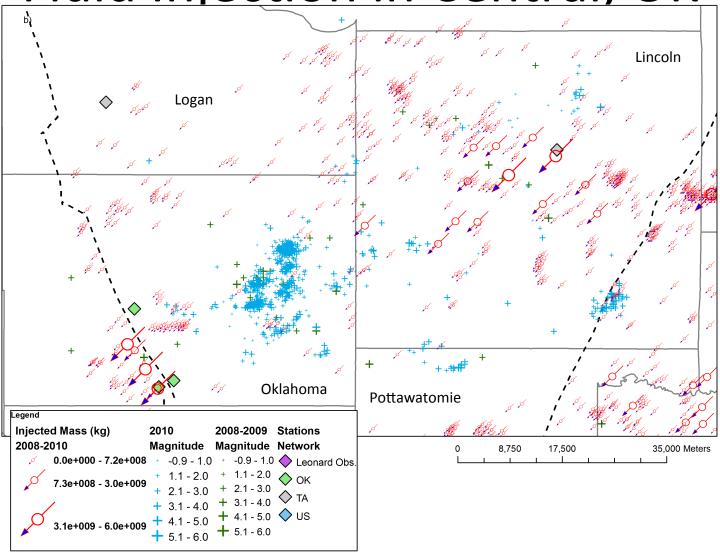



# Induced Seismicity from Hydraulic Fracturing

- Recent Cases from Oklahoma
  - Eola Field, Garvin County, ~100 earthquakes,
     M<sub>max</sub>=2.9
  - Possible, Union City Field, Canadian County, ~10 earthquakes, M<sub>max</sub>=3.4
  - Examining other possible cases
- Other recent cases
  - Blackpool, United Kingdom, >50 earthquakes,
     M<sub>max</sub>=2.3
  - Horn River Basin, British Columbia, >40 earthquakes,  $M_{max}$ =3.5

#### Eola Field, Garvin County

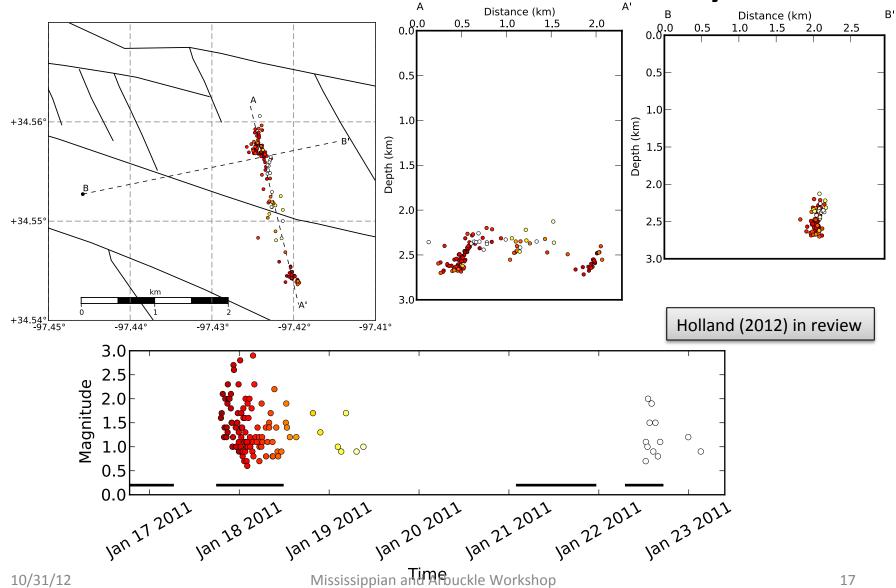


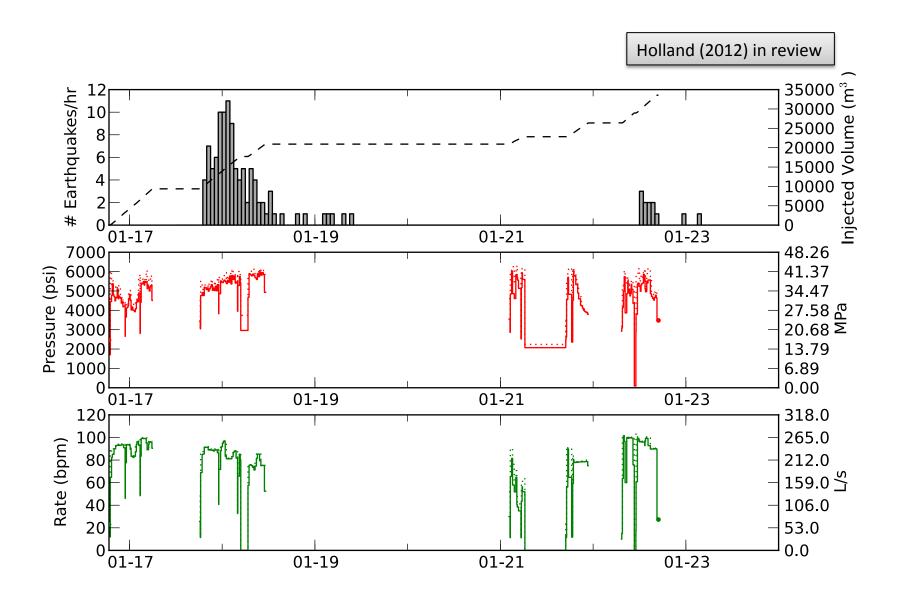

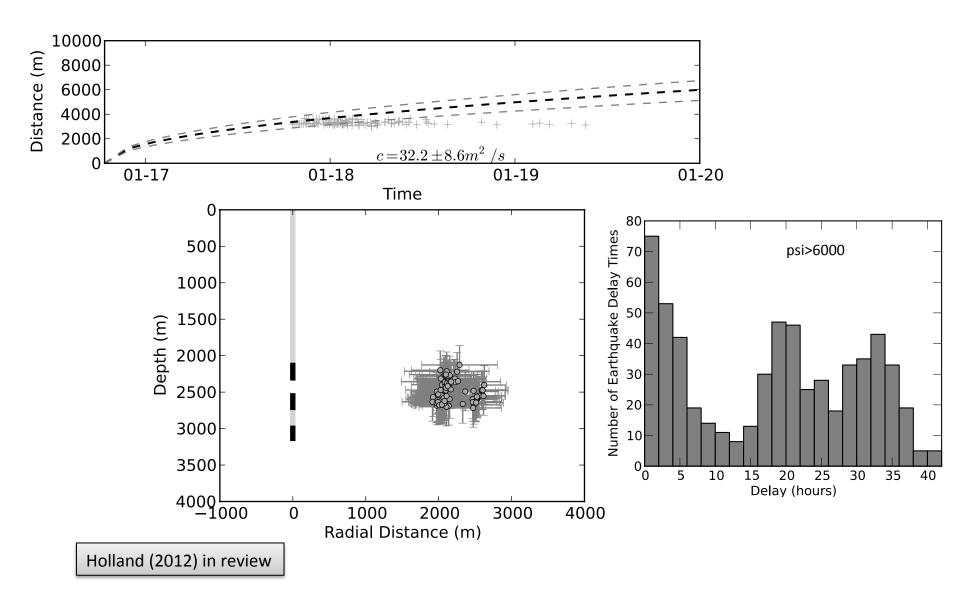


#### Union City Field, Canadian County

- Straight Arrow Well
- 16 stage frac
  - Completed 3/121:00 UTC
  - First earthquake3/11 07:41
  - M3.4 at 23:57
  - Total 10earthquakesM2.1-3.4 on 3/11
- Visually identify similar examples

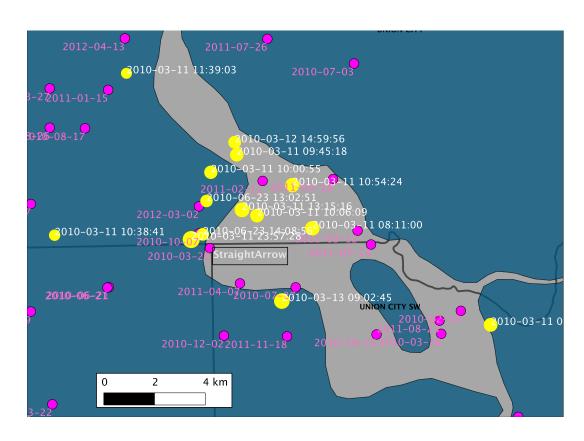


# Induced Seismicity from Hydraulic Fracturing

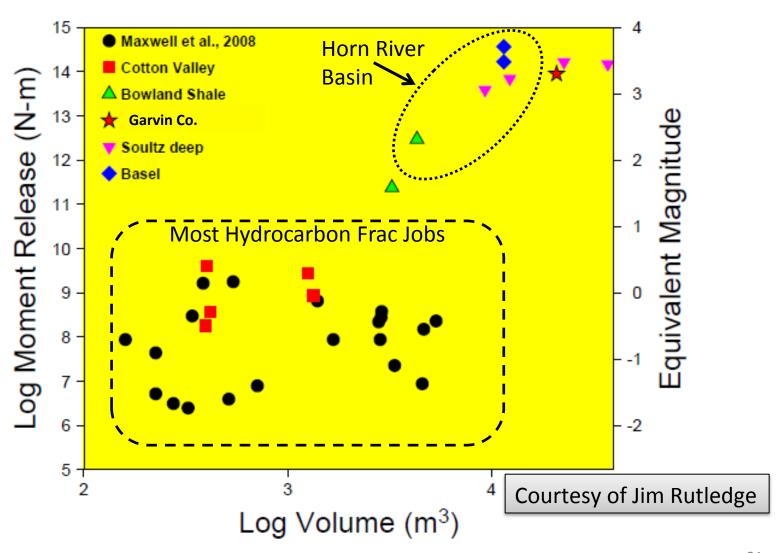

## Maximum Magnitude

- Earthquake magnitude is related to rupture area and the average slip over that area
- Earthquake rupture dynamics
  - Big earthquakes start small
- M<sub>max</sub> controlled by
  - fault size and properties
  - stress on the fault
  - initial rupture energy



# Large faults represent large potential hazards

- knowing whether or not they are favorably oriented for slip is important
- but to be cautious maybe greater set-backs are warranted

# Concerns of Induced Seismicity in the Mississippian Play

- Significant amount of hydraulic fracturing
- Large amounts of produced water to dispose of within the Arbuckle
- Arbuckle is near the basement where faults may be stressed to near failure
  - Fractures and faults in basement may be poorly if identified at all


## **Avoiding Potentially Active Faults**

154 earthquake focal mechanisms

 Define the distribution of orientations for active faults in Oklahoma


 This information can be used to modify operations to avoid faults

- oriented in a way that is more likely to have triggered earthquakes
- or are large, which may not be completely favorable to slip, but pose a greater hazard

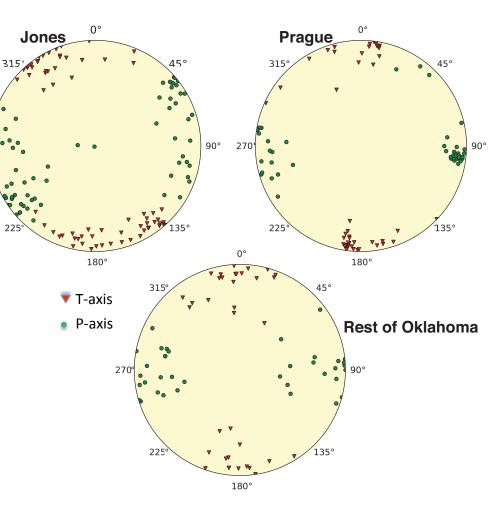


Optimal Fault Orientations in Oklahoma (in review Seismol. Res. Lett.)

# Calculate a Probability Density Function (PDF) from fault orientations

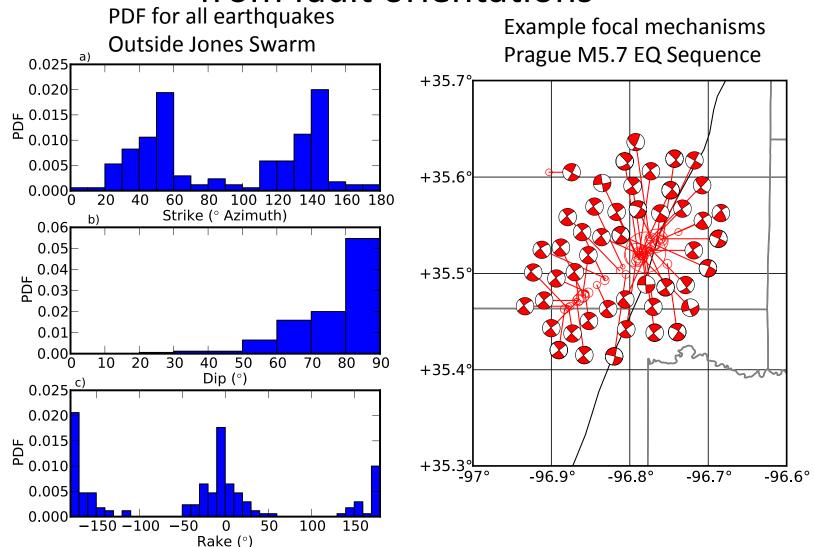


#### Characterizing Fault Rupture Likelihood

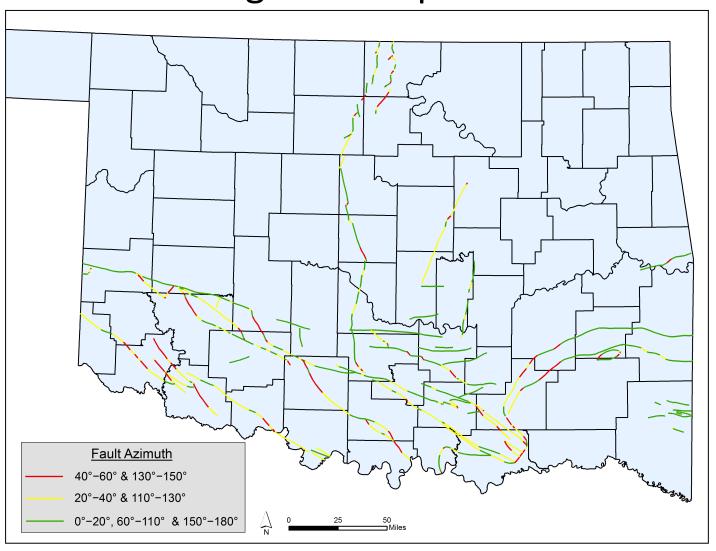

## Risk Mitigation Strategies

- 1. Avoid injection into active or potentially active faults
- 2. Minimize and monitor pore pressure changes at depth
- Install local seismic monitoring arrays
- 4. Establish modification protocols in advance
- 5. Be prepared to alter plans or abandon wells

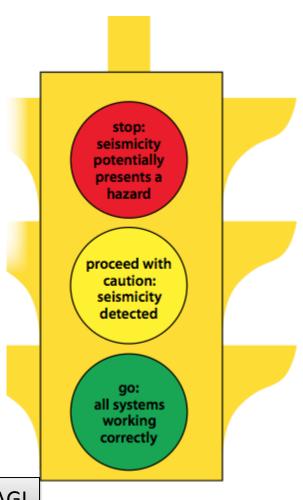

Zoback (2012) Earth AGI

# OGS Seismic Station Sponsorship



- Provides a way to transparently address the possibility of induced seismicity
- Removes duplication between operators
- Can be tailored to meet individual operators requirements
- Rapid reporting for operational feedback for participants
- Cost effective
- Improves products like
  - optimal fault orientations
  - Earthquake locations
- Equipment donations are tax deductible